


STANDARD FEATURES:

- ✓ Reverse Osmosis membrane
- ✓ Stainless steel membrane vessel
- ✓ Powder-coated steel frame
- ✓ Powder-coated steel pre-filter bracket
- ✓ Liquid-filled system pressure gauge and inlet/outlet pre-filter gauges
- ✓ Fixed waste / recycle flow controls, stainless steel
- ✓ Storage tank pressure switch
- ✓ Feed water inlet solenoid valve
- ✓ Feed water low pressure switch
- ✓ Rotary vane pump
- ✓ 10" 5 micron sediment pre-filter (1)
- ✓ 10" carbon block pre-filters (2)
- ✓ 110 volt—50/60hz

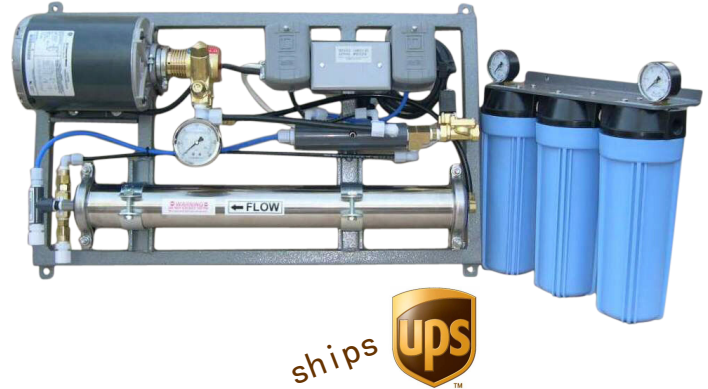

Options:

- ▶ Nanofiltration membrane
(Removes 98% hardness, up to 85% TDS, high recovery rate)
- ▶ Float switch for open tank
- ▶ 220v / 60hz ...or... 220v / 50hz

MODEL	*GPD	Feed TDS		Membrane size	HP	110v-60hz amps	220v-60hz-1ph amps	RECOVERY RATE	PIPING			DIMENSIONS weight lbs.
		2,000 BELOW	ABOVE						inlet	waste	prod	
COMWM150S COMWM150	175+ 150+	●	●	2.5" x 14" 2.5" x 14"	1/2hp 1/2hp	7.2 7.2	3.6 3.6	50—60%	1/2" FPT	3/8" FPT	3/8" FPT	20"H x 30"W x 7"D 53 lbs.
COMWM250S COMWM250	275+ 250+	●	●	2.5" x 21" 2.5" x 21"	1/2hp 1/2hp	7.2 7.2	3.6 3.6	50—60%	1/2" FPT	3/8" FPT	3/8" FPT	20"H x 30"W x 7"D 55 lbs.
COMWM450S COMWM450	475+ 450+	●	●	4" x 14" 4" x 14"	1/2hp 1/2hp	7.2 7.2	3.6 3.6	50—60%	1/2" FPT	3/8" FPT	3/8" FPT	20"H x 30"W x 7"D 58 lbs.
COMWM800S COMWM800	850+ 800+	●	●	4" x 21" 4" x 21"	3/4hp 3/4hp	10.4 10.4	5.2 5.2	50—60%	1/2" FPT	3/8" FPT	3/8" FPT	20"H x 30"W x 7"D 63 lbs.

FEED WATER PARAMETERS:

◆Temperature 85° F maximum ◆Pressure 40 - 80 psi maximum ◆TDS 2000-5000ppm (consult Dealer for specific model. ◆Iron tolerance 0.5 ppm maximum ◆Hydrogen sulfide must be removed ◆Silica tolerance can not be higher than 100 ppm in the concentrate stream. Antiscalant should be considered for any levels over 75 ppm. ◆Turbidity should be removed ◆Hardness over 10gpg should be softened.

OPERATING PARAMETERS:

◆Operating pressure range from 150—200 psi maximum ◆Water recovery is factory set at 50—60% ◆pH range 3 - 11 ◆Flow rates are determined by the membrane mfg'r's. testing criteria of 1500 ppm NaCl solution, 77°F water temperature, 225 psi at 10-15% recovery. Typical membrane salt rejection is 95—99%. *Actual flow rates may vary depending on the pre-treatment used, water conditions, system size, membrane array and applied pressure.

Manufactured by:

Rev. 01-2018



E-Mail: sales@rosystemsinternational.com
Web: www.rosystemsinternational.com
Phone: 951-940-4300 Fax: 951-346-3904